

KNAPHEIDE
SINCE 1848


CRANE BODIES



KNAPHEIDE CRANE BODIES

Knapheide Crane Bodies are purpose-built to hold up under the most extreme of lifting conditions.

With all the industry-leading security and durability features of our Service Bodies, the Knapheide Crane Body is an easy choice.

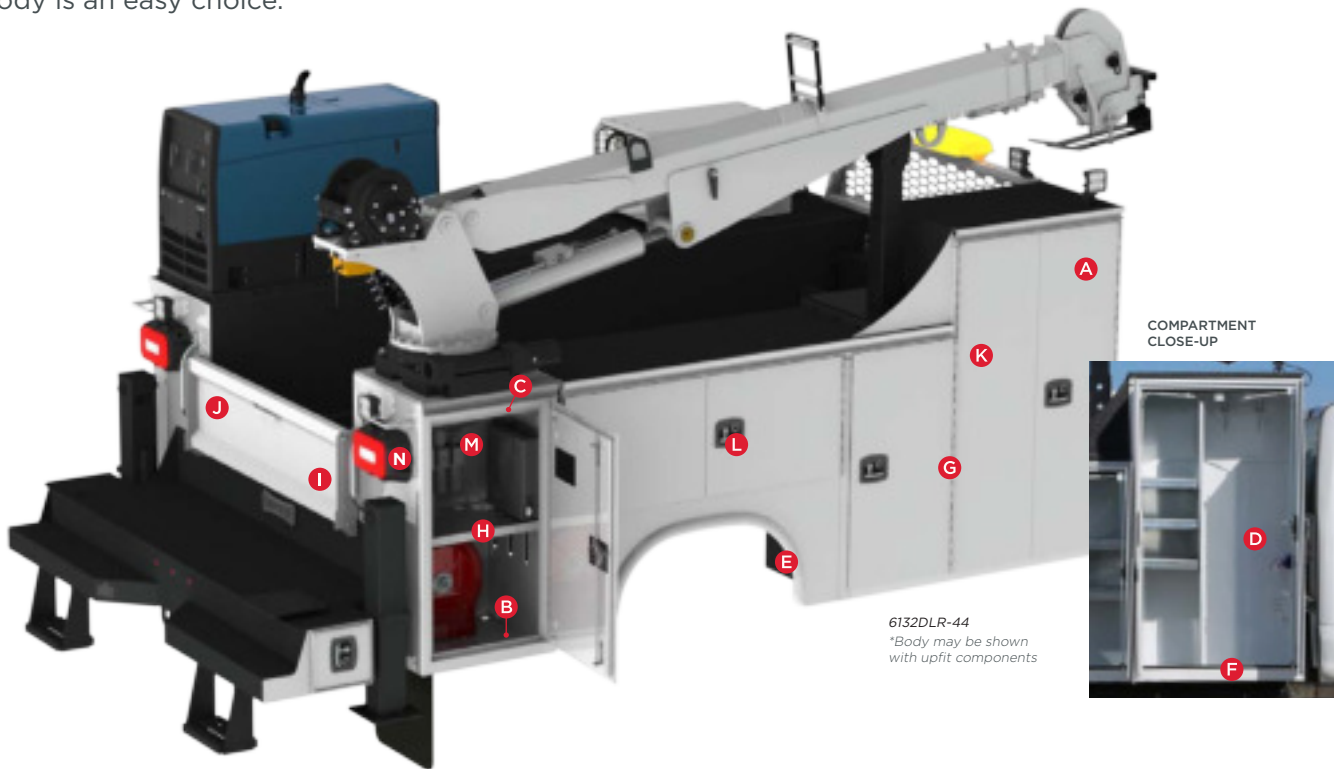

// 44 & 60 CRANE BODIES

Knapheide 44 and 60 Crane Bodies are built with heavy lifting in mind. The 44 bodies are designed to support a maximum crane rating of 44,000 ft-lb., while the 60 support a maximum crane rating of 60,000 ft-lb. with ease. Both are designed to handle the rigors of your everyday extreme lifting using a unique torq-isolator support system understructure.

THE MOST ADVANCED CRANE BODY DESIGN

Knapheide 44 and 60 Crane Bodies feature our unique torq-isolator crane support system. The reinforced crane box transfers lift forces into the full-length torsion-box subframe and outriggers, not the side compartments.



Visit knapheide.com/quote and fill out the form to receive a quote and additional product information.

STANDARD FEATURES

A Compartment doors constructed of double-shell, 14-gauge outer panel, and two-sided A-40 galvanized steel internal reinforcement for durability and long life

B Compartments feature 12-gauge bottom and end panels

C Vertical compartment doors employ double-spring over-center door retainers for elimination of involuntary swing

D Medium gloss, mar-resistant, light gray finish brightens interiors and makes finding contents easier

E Rugged 12- and 14-gauge two-sided A-40 galvanized steel body shell

F Neoprene door seals protect compartments from the weather

G Continuous stainless steel hinges are pry-proof and corrosion-resistant

H Fixed shelf in crane compartment

I Two chrome grab handles

J Bolt-on slammable tailgate

K Overlap doors on front vertical and horizontal compartments

L Automotive quality 3-point T-handle latches

M Drip pan under crane mount

N Upgraded surface mount lighting system features LED S/T/T and B/U, LED strobe option with (8) selectable patterns, and built-in reflectivity for additional safety*

**Additional wire harness required for strobe lights*

**Lights covered by 3-year limited warranty*

Other features not shown:

- 1/8" tread plate floor, tops, and backs. Full-seam continuous welded.
- Side wall shelf clips with 2" adjustable spacing
- Rubber fenderettes (model 6132DLHR-60 only)
- 14-gauge inner partitions of compartments
- Complete undercoating provides protection from corrosion and road debris
- Cargo tie-downs are D-ring type and recessed in floor, with a 6,000-lb. capacity (4 in 108" bodies, 6 in 132" bodies)
- Pre-drilled mounting holes on crane pedestal for ease of installing most popular cranes
- Electrodeposition prime-paint system provides superior corrosion resistance


Crane Bodies feature no standard shelving. Optional shelving and drawer packages are available (see page 4).

// OPTIONAL SHELVING AND DRAWER PACKAGES


AVAILABLE FOR -44 AND -60 BODIES ONLY

108 SERIES


PACKAGE A

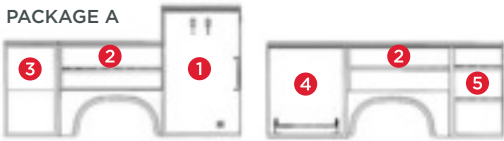

PACKAGE B




PACKAGE C




132 SERIES


PACKAGE A

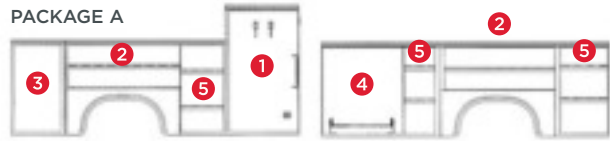

PACKAGE B

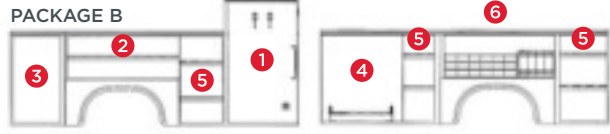

PACKAGE C

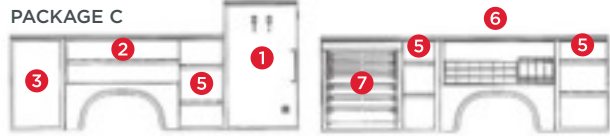

- 1** Gas bottle retainer (2 bottles), vented top and bottom, (2) combination stationary/swivel hooks

For non-R models (no raised compartment), the bottle brackets are replaced with (2) adjustable divider shelves.

- 2** One shelf with (8) dividers each
- 3** Fixed shelf (standard)

- 4** Pull-out tray (500-lb. capacity), 3/4" plywood lined

- 5** (2) adjustable divider shelves with (4) dividers each

- 6** 18-drawer cabinet and book rack

- 7** 7-drawer unit: (1) 7", (3) 5", and (3) 3" on full extension slides with 250-lb. capacity

// OPTIONAL BUMPERS

AVAILABLE FOR -44 AND -60 BODIES

- 21" deep step and work surface (DLH Series bumper has lower step, 5" deep)
- Grip tape supplied for step surfaces
- Through-compartment with door on each side (DL Series clear opening 6-3/4"x6-1/8", DLH Series clear opening 6-3/4"x8-1/8")
- Removable vise bracket with receiver tube
- Hitch ready - DL Series has 2" I.D. receiver, DLH Series has pintle hook ready mounting with safety chain anchors (drawbar and pintle hook not supplied)
- Weight with receiver tube for crane: 438 lb. (DL Series), 611 lb. (DLH Series)



DL SERIES



DLH SERIES



6132DLR-44
**Body may be shown
with upfit components*




AVAILABLE MODELS

MODEL	BODY WEIGHT ¹	MAXIMUM CRANE SIZE	CHASSIS CA	CHASSIS MINIMUM GVWR	MAXIMUM TIRE SIZE
6108DL-44	2,388 lb.	6,000 lb. (44,000 ft-lb.)	60"	15,000 lb. (17,500 for 6,000-lb. crane)	19.5" diameter rims, 34" tire diameter
6108DLR-44	2,408 lb.	6,000 lb. (44,000 ft-lb.)	60"	15,000 lb. (17,500 for 6,000-lb. crane)	19.5" diameter rims, 34" tire diameter
6132DL-44	2,911 lb.	6,000 lb. (44,000 ft-lb.)	84"	15,000 lb. (17,500 for 6,000-lb. crane)	19.5" diameter rims, 34" tire diameter
6132DLR-44	2,931 lb.	6,000 lb. (44,000 ft-lb.)	84"	15,000 lb. (17,500 for 6,000-lb. crane)	19.5" diameter rims, 34" tire diameter
6132DLHR-60	3,200 lb.	10,000 lb. (60,000 ft-lb.)	84"	19,000 lb. (27,000 for 10,000-lb. crane)	22.5" diameter rims, 46" tire diameter


¹Body weight does not include bumper or shelving

*Final determination of chassis specifications and minimum GVWR required for body, crane and other mounted equipment is the responsibility of the installer.
See crane manufacturer's specifications for minimum chassis requirements.


// 6108DL-44

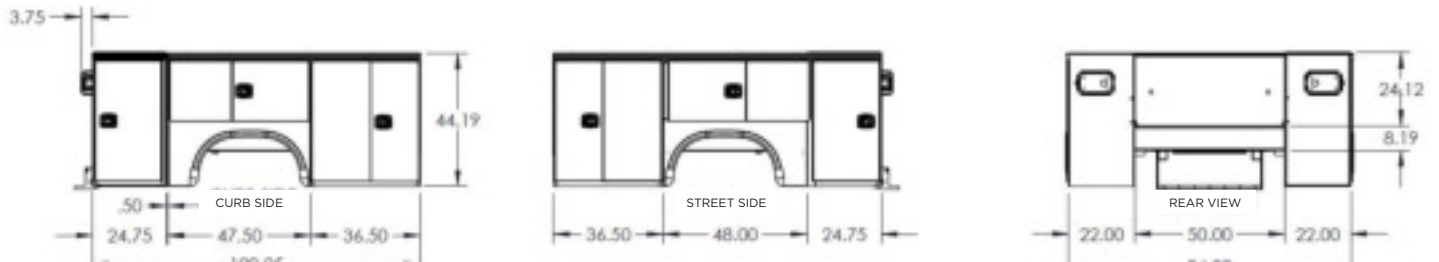

// 6132DL-44

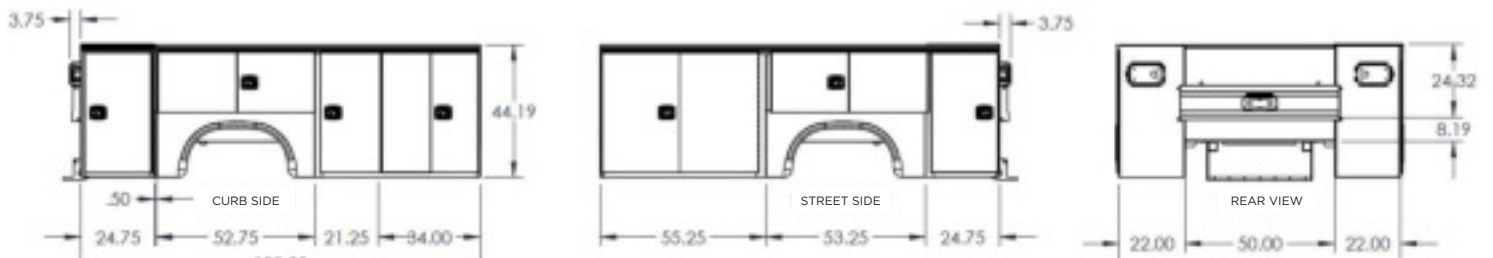

// 6132DLHR-60

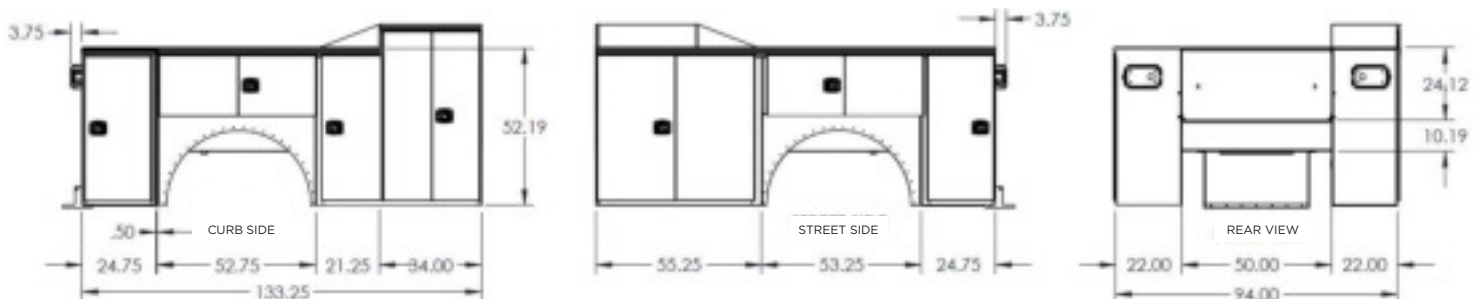

// 30 CRANE BODIES

With the storage and efficiency of a service body, the Knapheide 30 Crane Body is specifically designed and reinforced to support up to a 30,000 ft-lb. crane. This versatile size and functionality makes it an easy choice for field applications.



Visit knapheide.com/quote and fill out the form to receive a quote and additional product information.

STANDARD FEATURES

- A** Rugged 14-gauge, two-sided A-40 galvanized steel body shell
- B** Crane compartment is reinforced to support up to a 30,000 ft-lb. crane
- C** Torsion box understructure design strengthens floor to resist flexing
- D** Compartment tops and backs (cargo area) have 1/8" tread plate overlays to withstand jobsite abuse
- E** Exclusive "Return Flange" floor design provides support, adds floor strength, and eliminates a rust-prone exposed seam between floor and side compartments
- F** Double panel doors with internal reinforcements provide superior rigidity and sound dampening
- G** Neoprene door seals protect compartments from the weather
- H** Continuous stainless steel hinges are pry-proof and corrosion-resistant
- I** Automotive-quality, rotary-style latches make opening and closing easy
- J** Interior light guards protect recessed lighting and wiring
- K** Includes 250-lb. capacity adjustable divider shelves
- L** Upgraded surface mount lighting system features LED S/T/T and B/U, LED strobe option with (8) selectable patterns, and built-in reflectivity for additional safety*
 - *Additional wire harness required for strobe lights
 - *Lights covered by 3-year limited warranty


Other features not shown:

- Drip pan shipped loose for installation under the crane
- Bolt-on slammable tailgate
- Electrodeposition prime-paint system provides superior corrosion resistance

AVAILABLE MODELS

MODEL	MAX CRANE RATING	CHASSIS CA	BODY LENGTH NOMINAL	BODY HEIGHT	BODY WIDTH	COMPARTMENT DEPTH	FLOOR WIDTH	NET WEIGHT
6132DL-30	30,000 ft-lb.	84"	132"	40"	94"	20"	54"	2,612 lb.
6132DLR-30	30,000 ft-lb.	84"	132"	40"	94"	20"	54"	2,675 lb.

POPULAR OPTIONS



ROCK GUARDS



CARGO TIE DOWNS


Already standard on 44 and 60 models



STEEL MECHANIC DRAWERS



LED COMPARTMENT LIGHTING




ALUMINUM DRAWERS



SORTIMO



MASTER LOCKING SYSTEM



GAS BOTTLE RETAINER

// OPTIONAL BUMPER

AVAILABLE FOR 30 BODIES

The outrigger receiver bumper is a heavy-duty Galva-Grip bumper with an integral tube rated for cranes up to 30,000 ft-lb.

- Bumper and kick-plate are 12-gauge galvanneal
- Grip tread punched into the step surface
- 4"x6"x3/8" outrigger receiver tube
- Features a 2" towing receiver hitch tube
(12,000lbs. max trailer, 1,200lbs. max tongue weight)



OUTRIGGER RECEIVER BUMPER



COMMITMENT TO CORROSION RESISTANCE

Corrosion won't be a concern when you buy quality Knapheide products. To give you the best corrosion protection, we utilize a state-of-the-art, custom-designed, 12-step, SST cathodic electrodeposition finishing system, called "E-Coat."

It bonds prime paint to steel by an electroplating process to give you a superior coat of primer, resulting in better corrosion protection compared to spraying methods.

This system allows us to create products with the highest level of corrosion resistance available.

NEVER SETTLE

If you are going to be a leader, it takes more than building a high-quality product. It means never being totally satisfied with that product, no matter how high quality it may be. It requires constant vigilance and a willingness to take a chance on something new. And it means exceeding expectations every time. As the industry changes, one thing never will—our commitment to making customers like you as productive and efficient as possible. We know you don't settle, and we don't either. That's why we want you never to settle for anything less than Knapheide on the back of your truck.

Knapheide. Never settle.

SIX-YEAR, LIMITED WARRANTY



NO RUST
THROUGH



DOOR HINGES WILL
NOT FAIL OR COME
OFF BODY



LATCHES AND LOCK
CYLINDERS WILL NOT
FAIL TO OPERATE



SHELVES WILL NOT
BEND UNDER MAX.
LOAD OF 250 LBS.

Visit www.knapheide.com/warranty for more information.



The Knapheide Manufacturing Company
1848 Westphalia Strasse | Quincy, IL 62305

217-222-7131
www.knapheide.com

KNAPHEIDE
SINCE 1848