


# KNAPHEIDE CRANE BODIES



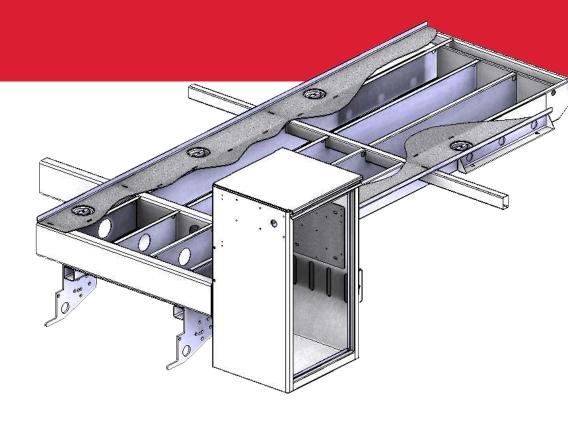

### **CRANE BODY UNDERSTRUCTURE**

Knapheide 44 and 60 Crane Bodies feature our unique torq-isolator crane support system. The reinforced crane box transfers lift forces into the full-length torsion-box subframe and outriggers, not the side compartments.

3

# **-44 AND -60 MODELS**

Knapheide 44 and 60 Crane Bodies are built with heavy lifting in mind. The 44 bodies are designed to support a maximum crane rating of 44,000 ft-lb., while the 60 support a maximum crane rating of 60,000 ft-lb. with ease. Both are designed to handle the rigors of your everyday extreme lifting using a unique torq-isolator support system understructure.

#### -30 MODELS

With the storage and efficiency of a service body, the Knapheide 30 Crane Body is specifically designed and reinforced to support up to a 30,000 ft-lb. crane. This versatile size and functionality makes it an easy choice for field applications.

### **POPULAR VOCATIONS**



2

# O

#### **A. DOUBLE PANELED DOORS**

made of galvanneal steel (14-gauge outer panel, 20-gauge inner panel) are reinforced with internal braces for durability

#### **B. 3-POINT T-HANDLE LATCHES**

ensure your compartment doors stay closed and are individually lockable

#### **C. OVERLAP DOORS**

on front vertical and horizontal compartments

#### D. BODY SHELL

rugged 12- and 14-gauge two-sided A-40 galvanneal steel



# FEATURES NOT SHOWN

SIDE WALL SHELF CLIPS

with 2" adjustable spacing

14-GAUGE INNER **PARTITIONS OF COMPARTMENTS** 

#### COMPLETE UNDERCOATING provides protection from

corrosion and road debris

#### **CARGO TIE-DOWNS**

are D-ring type and recessed in floor, with a 6,000-lb. capacity (4 in 108" bodies, 6 in 132" bodies)

PRE-DRILLED MOUNTING HOLES on crane pedestal for ease of

#### **ELECTRODEPOSITION** PRIME-PAINT SYSTEM

installing most popular cranes

provides superior corrosion

F. INTEGRATED LED S/T/T AND B/U, LED STROBES with (8) selectable patterns and built-

in reflectivity mounted to external rear light boxes made of UV-resistant ABS material

#### **G. BOLT-ON SLAMMABLE TAILGATE**

# **H.** RUBBER FENDERETTES

(model 6132DLHR-60 only)



S

Ш

 $\alpha$ 

⋖

Ш

ш

Z Ш

Σ

 $\alpha$ 

<

Д

Σ

0  $\bigcirc$ 

# **DOUBLE-SPRING OVER-CENTER RETAINER**

on vertical compartment doors eliminate involuntary swing



#### **NEOPRENE DOOR SEALS**

protect compartments from the weather



## **COMPARTMENT INTERIOR**

medium gloss, mar-resistant, light gray finish brightens interiors and makes finding contents easier



# **CONTINUOUS STAINLESS STEEL HINGES**

are pry-proof and corrosion-resistant

# REAR CRANE COMPARTMENT



# **FIXED SHELF**

in crane compartment



**DRIP PAN** located under crane mount



**12-GAUGE BOTTOM AND END PANELS** 

applies to all compartments

# A. REINFORCED REAR VERTICAL CURB SIDE COMPARTMENT

eliminates flexing and twisting of side packs

#### **B.** DOUBLE PANELED DOORS

made of 20-gauge galvanneal steel are reinforced with internal braces for durability

# C. AUTOMOTIVE-QUALITY, ROTARY-STYLE LATCHES

make opening and closing easy

#### D. BODY SHELL

rugged 12- and 14-gauge two-sided A-40 galvanneal steel

# E. TORSION BOX UNDERSTRUCTURE

design strengthens floor to resist flexing


# F. INTEGRATED LED S/T/T AND B/U, LED STROBES

with (8) selectable patterns and builtin reflectivity for additional safety\*\*

\*Additional wire harness required for strobe lights \*\*Covered under 3-year limited warranty

# G. BOLT-ON SLAMMABLE TAILGATE

# H. EXCLUSIVE "RETURN

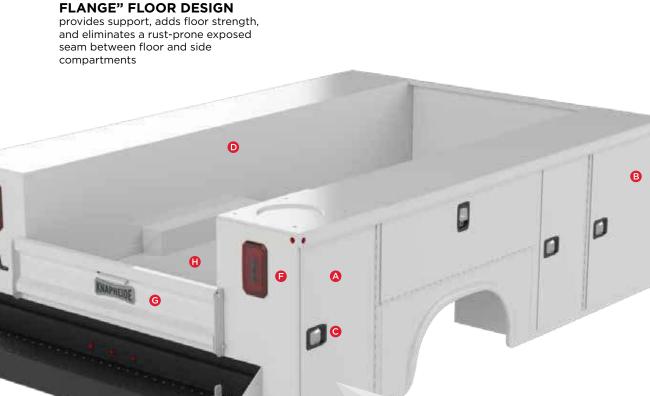



FEATURES NOT SHOWN

ELECTRODEPOSITION PRIME-PAINT SYSTEM provides superior corrosion resistance

shipped loose for installation

under the crane



S

Ш

 $\alpha$ 

⋖

Ш

ш

Z

Ш

Σ

 $\alpha$ 

P A

Σ

0

# DOUBLE-SPRING OVER-CENTER RETAINER

on vertical compartment doors eliminate involuntary swing



# NEOPRENE DOOR SEALS

protect compartments from the weather



**ADJUSTABLE DIVIDER SHELVES** 

250-lb. capacity



# CONTINUOUS STAINLESS STEEL HINGES

are pry-proof and corrosion-resistant



#### **INTERIOR LIGHT GUARDS**

protect recessed lighting and wiring



#### THE CRANE REINFORCEMENT KIT

allows you to incorporate a crane up to 4,000 lb. capacity (30,000 ft-lb. max.) onto the rear curb side corner of your body



# POPULAR OPTIONS

# OPTIONAL SHELVING AND DRAWER PACKAGES

**AVAILABLE FOR -44 AND -60 BODIES ONLY** 

- 1 Gas bottle retainer (2 bottles), vented top and bottom, (2) combination stationary/ swivel hooks
  - For non-R models (no raised compartment), the bottle brackets are replaced with (2) adjustable divider shelves.
- 2 One shelf with (8) dividers each
- **3** Fixed shelf (standard)

- 4 Pull-out tray (500-lb. capacity), 3/4" plywood lined
- 5 (2) adjustable divider shelves with (4) dividers each
- 6 18-drawer cabinet and book rack
- 7 7-drawer unit: (1) 7", (3) 5", and (3) 3" on full extension slides with 250-lb. capacity

# 

# PACKAGE B PACKAGE B PACKAGE B PACKAGE C PACKAGE C PACKAGE C



# POPULAR OPTIONS

# **BUMPERS**

10

# -44 AND -60 CRANE BODIES

The outrigger receiver bumper is a heavy-duty Galva-Grip bumper.

- Bumper and kick-plate are 12-gauge galvanneal
- Grip tread punched into the step surface
- 4"x6"x3/8" outrigger receiver tube
- Features a 2" towing receiver hitch tube (18,000lbs. max trailer, 1,800lbs. max tongue weight) DL (30,000lbs. max trailer, 6,000lbs. max tounge weight) DLH





# -30 CRANE BODIES

- 21" deep step and work surface (DLH Series bumper has lower step, 5" deep)
- Grip tape supplied for step surfaces
- Through-compartment with door on each side (DL Series clear opening 6-3/4"x6-1/8", DLH Series clear opening 6-3/4"x8-1/8")
- Removable vise bracket with receiver tube
- Weight with receiver tube for crane: 438 lb. (DL Series), 611 lb. (DLH Series)



11



# POPULAR OPTIONS




ROCK **GUARDS** 



**CARGO TIE DOWNS** 



STEEL MECHANIC DRAWERS



LED COMPARTMENT LIGHTING



**ALUMINUM DRAWERS** 



GAS BOTTLE **RETAINER** 



MASTER LOCKING SYSTEM

# MODEL OPTIONS

# -44 AND -60 CRANE BODIES

MODEL	BODY WEIGHT <sup>1</sup> MAXIMUM CRANE S		CHASSIS CA	CHASSIS MINIMUM GVWR	MAXIMUM TIRE SIZE	
6108DL-44	2,629 lb.	6,000 lb. (44,000 ft-lb.)	60"	15,000 lb. (17,500 for 6,000-lb. crane)	19.5" diameter rims, 34" tire diameter	
6108DLR-44	2,689 lb.	6,000 lb. (44,000 ft-lb.)	60"	15,000 lb. (17,500 for 6,000-lb. crane)	19.5" diameter rims, 34" tire diameter	
6132DL-44	3,037 lb.	6,000 lb. (44,000 ft-lb.)	84"	15,000 lb. (17,500 for 6,000-lb. crane)	19.5" diameter rims, 34" tire diameter	
6132DLR-44	3,095 lb.	6,000 lb. (44,000 ft-lb.)	84"	15,000 lb. (17,500 for 6,000-lb. crane)	19.5" diameter rims, 34" tire diameter	
6132DLHR-60	3,186 lb.	10,000 lb. (60,000 ft-lb.)	84"	19,000 lb. (27,000 for 10,000-lb. crane)	22.5" diameter rims, 46" tire diameter	

# -30 CRANE BODIES

MODEL	MAX CRANE RATING	CHASSIS CA	BODY LENGTH NOMINAL	BODY HEIGHT	BODY WIDTH	COMPARTMENT DEPTH	FLOOR WIDTH	NET WEIGHT
6108DL-30	30,000 ft-lb.	60"	108"	40"	94"	20"	54"	2,306 lb.
6132DL-30	30,000 ft-lb.	84"	132"	40"	94"	20"	54"	2,721 lb.
6132DLR-30	30,000 ft-lb.	84"	132"	40"	94"	20"	54"	2,757 lb.

12 13

<sup>&</sup>lt;sup>1</sup>Body weight does not include bumper or shelving \*Final determination of chassis specifications and minimum GVWR required for body, crane and other mounted equipment is the responsibility of the installer. See crane manufacturer's specifications for minimum chassis requirements.

COMMITMENT TO

CORROSION RESISTANCE

Corrosion won't be a concern when you buy quality Knapheide products. To give you the best corrosion protection, we utilize a state-of-the-art, custom-designed, 12-step, SST cathodic electrodeposition finishing system, called "E-Coat."

It bonds prime paint to steel by an electroplating process to give you a superior coat of primer, resulting in better corrosion protection compared to spraying methods.

This system allows us to create products with the highest level of corrosion resistance available.



FOLLOW US LIKE US TAG US



# SIX YEAR, LIMITED TIME WARRANTY



NO RUST THROUGH



DOOR HINGES
WILL NOT FAIL OR
COME OFF BODY



LATCHES AND LOCK CYLINDERS WILL NOT FAIL TO OPERATE



SHELVES WILL NOT BEND UNDER MAX. LOAD OF 250 LBS.

TO LEARN MORE VISIT

www.knapheide.com/warranty



# **NEVER SETTLE**

If you are going to be a leader, it takes more than building a high-quality product. It means never being totally satisfied with that product, no matter how high quality it may be. It requires constant vigilance and a willingness to take a chance on something new. And it means exceeding expectations every time. As the industry changes, one thing never will—our commitment to making customers like you as productive and efficient as possible. We know you don't settle, and we don't either. That's why we want you never to settle for anything less than Knapheide on the back of your truck.

KNAPHEIDE. NEVER SETTLE.



The Knapheide Manufacturing Company 1848 Westphalia Strasse | Quincy, IL 62305 217-222-7131 www.knapheide.com