


# KNAPHEIDE **DUMP BODIES**



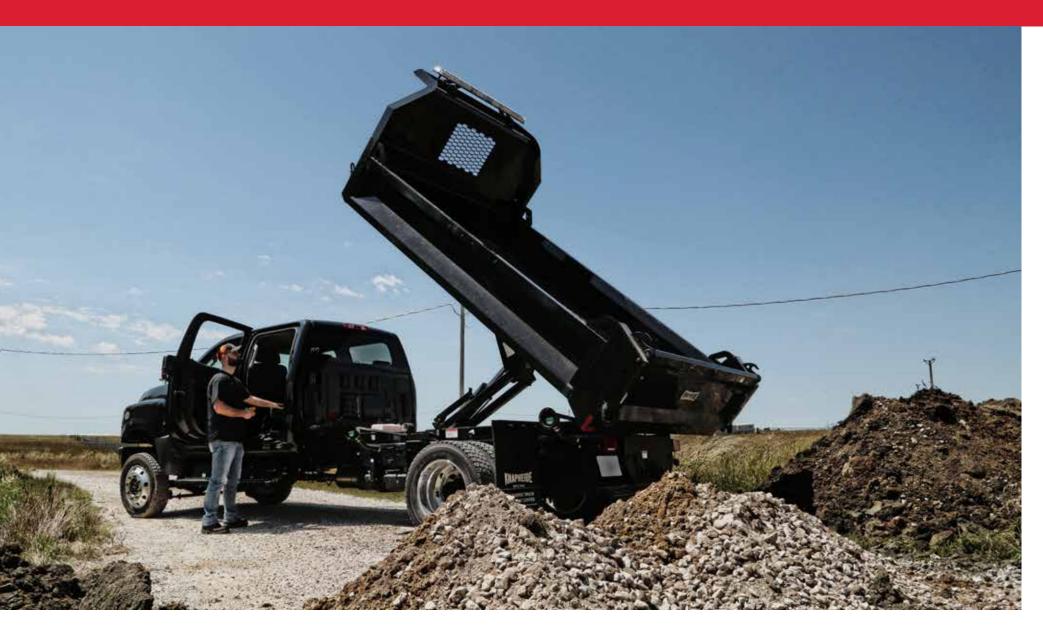

#### **SUBFRAME HOIST**

ED models are powered by a 12-volt pump with a pendant switch control

Double acting hoist provides power up and down

#### **DUMP BODIES**

The Knapheide Dump Body is where style, versatility and durability come together. When landscape or general contractors need a productive dump body that will last a lifetime, they choose the Knapheide Dump Body every time.

Our Dump Bodies are available in 9'6" to 11'6" lengths and side heights of 12" or 16" to accommodate 2-1/2 to 4 cubic yard carrying capacity. Models have crossmemberless understructure and offer fixed or drop sides.

Select from a variety of options to make your Dump Body a perfect fit.

#### **POPULAR VOCATIONS**



# A. SELF-CLEANING SLOPED TOP RAILS AND LOWER RAILS

on sides and tailgate

# **B.** SIDES ARE CONSTRUCTED OF 12-GAUGE HIGH TENSILE STEEL

#### C. 2X6 SIDE BOARD POCKETS

on the sides at the front and rear allow for increased load capacity

# D. VERSATILE, DOUBLE ACTING TAILGATE

accommodates both drop-down, pick-up style and spreader applications

## E. QUICK RELEASE, ONE-HANDED

for easy drop-down action on the tailgate

#### F. TOE SAVER BRACKETS

located on both sides of the end rail for operator safety

#### **G. REAR CORNER POSTS**

equipped with a hook on each side for an optional tarp

#### **H.** QUARTER CAB PROTECTOR

constructed of 10-gauge high tensile steel with a punched window for visibility





CROSSMEMBERLESS UNDERSTRUCTURE

# DUMP BODIES CHASSIS UNDERSTRUCTURE CAPACITY LENGTH HIS

MODEL	SIDES	CHASSIS CLASS 3-5	UNDERSTRUCTURE STYLE	CAPACITY	LENGTH	SIDE HEIGHT	NET WEIGHT	HOIST MODEL	HOIST CAPACITY
KDBF912	Fixed	60 CA	Crossmemberless	2.50 yd.	9'6"	12"	1,472 lb.	KHA-1516SF	8.7 tons
KDBF916	Fixed	60 CA	Crossmemberless	3.29 yd.	9'6"	16"	1,553 lb.	KHA-1516SF	8.7 tons
KDBF1112	Fixed	84 CA	Crossmemberless	3.00 yd.	11'6"	12"	1,707 lb.	KHA-1520SF	8.6 tons
KDBF1116	Fixed	84 CA	Crossmemberless	4.00 yd.	11'6"	16"	1,798 lb.	KHA-1520SF	8.6 tons
KDBDS912	Drop	60 CA	Crossmemberless	2.50 yd.	9'6"	12"	1,455 lb.	KHA-1516SF	8.7 tons
KDBDS916	Drop	60 CA	Crossmemberless	3.29 yd.	9'6"	16"	1,523 lb.	KHA-1516SF	8.7 tons
KDBDS1112	Drop	84 CA	Crossmemberless	3.00 yd.	11'6"	12"	1,673 lb.	KHA-1520SF	8.6 tons
KDBDS1116	Drop	84 CA	Crossmemberless	4.00 yd.	11'6"	16"	1,746 lb.	KHA-1520SF	8.6 tons

MODEL OPTIONS

### FEATURES NOT SHOWN

#### DOUBLE PANEL TAILGATE

construction with 12-gauge HY50 outer panel and 10-gauge HY50 inner panel

BODIES ARE FULLY PROTECTED WITH KNAPHEIDE'S WATER-BASED UNDERCOAT

#### ELECTRODEPOSITION PRIME-PAINT SYSTEM

provides superior corrosion resistance

#### **DURABLE FLOOR PLATE**

constructed of two pieces of 7-gauge HRCQ with a full seam weld down the center. BODIES ARE CROSSMEMBERLESS AND FEATURE FULLY BOXED LONG SILLS

constructed of 10-gauge HY50 steel and run the entire length of the floor





# POPULAR OPTIONS



FRONT STROBE LIGHTS



TARP



BODY RAISE INDICATOR



UNDERBODY TOOLBOX



KNAP PACK



POLY BOARD EXTENSIONS



ICC BUMPER




CLASS V RECEIVER HITCH



METERING CHUTE

 $\mathbf{5}$ 

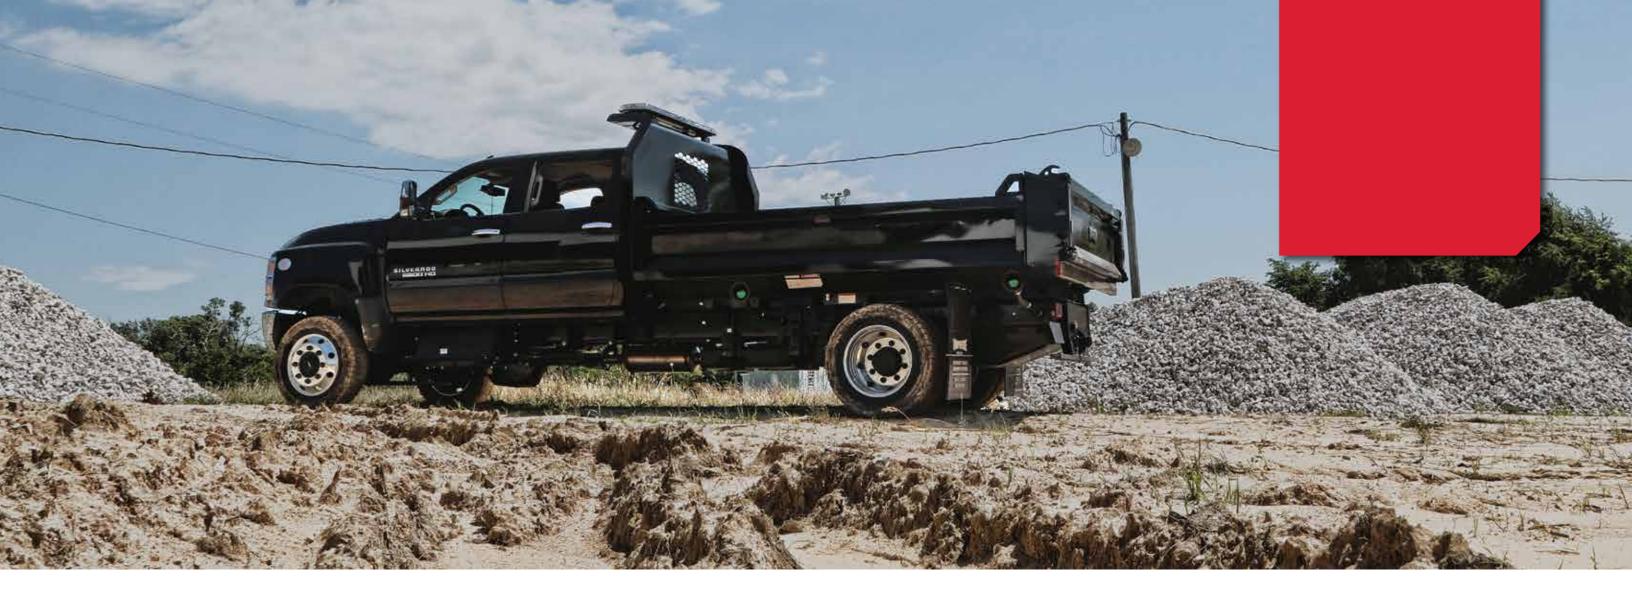

# CAB PROTECTORS

MODEL	STYLE	APPLICATION	HEIGHT	NET WEIGHT
KCP-025S26-P	Straight Quarter Cab	2-4 Yard Dumps	26.5"	171 lb.
KCP-025T26-P	Tapered Quarter Cab	2-4 Yard Dumps	26.5"	150 lb.
KCP-100S26-P	Straight Full Cab	2-4 Yard Dumps	26.5"	253 lb.

<sup>&#</sup>x27;-P' denotes prime paint; '-B' denotes black finish paint. GM 4500 / 5500 / 6500 chassis applications

MODEL	STYLE	APPLICATION	HEIGHT	NET WEIGHT	
KCP-025S19-P	Straight Quarter Cab	2-4 Yard Dumps	19"	147 lb.	
KCP-025T19-P	Tapered Quarter Cab	2-4 Yard Dumps	19"	130 lb.	
KCP-100S19-P	Straight Full Cab	2-4 Yard Dumps	19"	228 lb.	

'-P' denotes prime paint; '-B' denotes black finish paint. GM C/K 3500 chassis applications



STRAIGHT QUARTER CAB PROTECTOR



TAPERED QUARTER CAB PROTECTOR



STRAIGHT FULL CAB PROTECTOR

**y** 

### **COMMITMENT TO**

# CORROSION RESISTANCE

Corrosion won't be a concern when you buy quality Knapheide products. To give you the best corrosion protection, we utilize a state-of-the-art, custom-designed, 12-step, SST cathodic electrodeposition finishing system, called "E-Coat."

It bonds prime paint to steel by an electroplating process to give you a superior coat of primer, resulting in better corrosion protection compared to spraying methods.

This system allows us to create products with the highest level of corrosion resistance available.

FOLLOW US LIKE US TAG US



# THREE YEAR, LIMITED TIME WARRANTY





DEFECTS IN WORKMANSHIP



FREE FROM DEFECTS IN MATERIALS

TO LEARN MORE VISIT www.knapheide.com/warranty



## **NEVER SETTLE**

If you are going to be a leader, it takes more than building a high-quality product. It means never being totally satisfied with that product, no matter how high quality it may be. It requires constant vigilance and a willingness to take a chance on something new. And it means exceeding expectations every time. As the industry changes, one thing never will—our commitment to making customers like you as productive and efficient as possible. We know you don't settle, and we don't either. That's why we want you never to settle for anything less than Knapheide on the back of your truck.

KNAPHEIDE. NEVER SETTLE.



The Knapheide Manufacturing Company 1848 Westphalia Strasse | Quincy, IL 62305 217-222-7131 www.knapheide.com